ACT-1

Actuator Module

The ACT-1 is a Smart Module that has one open and one close relay to control inlets and curtain machines, with potentiometer feedback or without (timed). The ACT-1 features a built-in microprocessor that precisely controls equipment and provides safety protection.

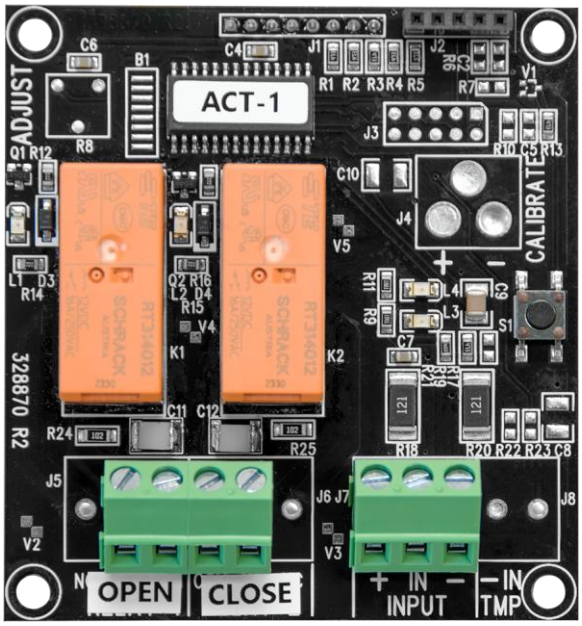

Ratings

- 15 A at 120/230 VAC, general-purpose (resistive)
- 1/2 HP at 120 VAC, 1 HP at 230 VAC

Before servicing the control or installing the module, switch OFF the incoming power at the source.

NOTE

If you are replacing an existing module, label all wires and cables before disconnecting them and removing the module.

Installation

You can install the module in any position **not marked** as “Extra Low Voltage Only”.

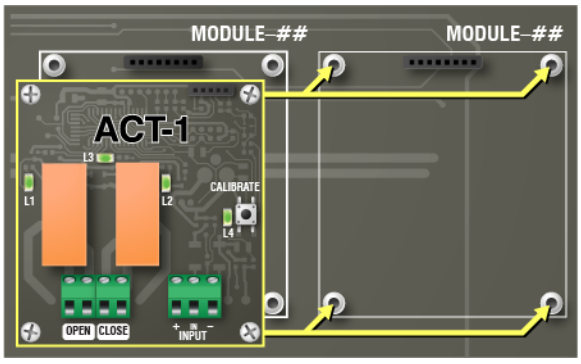

1. Position the module over the connector (A) and then press straight on to the connector.
2. Fasten the module in place using **all four screws** (B) provided.

Wiring examples

AC actuator

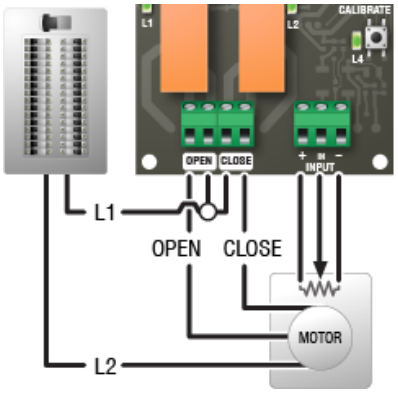

DC actuator

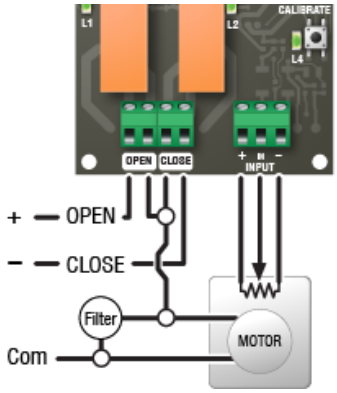
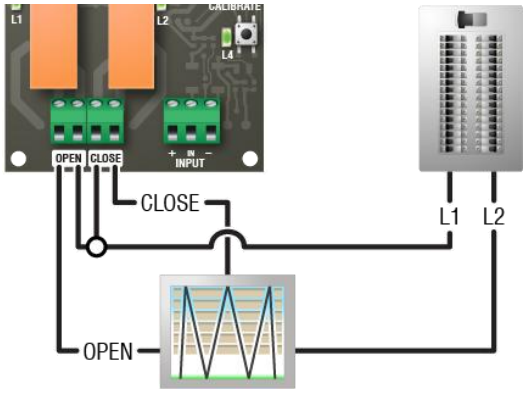
Curtain machine